

## 28V Low Current Consumption 300mA CMOS Voltage Regulator

### ■ INTRODUCTION

The SML311 series are a group of positive voltage regulators manufactured by CMOS technologies with low power consumption and low dropout voltage, which provide large output currents even when the difference of the input-output voltage is small. The SML311 series can deliver 300mA output current and allow an input voltage as high as 28V. The series are very suitable for the battery-powered equipments, such as RF applications and other systems requiring a quiet voltage source.

### ■ APPLICATIONS


- Cordless Phones
- Radio control systems
- Laptop, Palmtops and PDAs
- Single-lens reflex DSC
- PC peripherals with memory

### ■ FEATURES

- Low Quiescent Current: 1.8 $\mu$ A
- Operating Voltage Range: 2.5V ~ 28V
- Output Current: 300mA
- Low Dropout Voltage:  
200mV @ 100mA ( $V_{OUT} = 3.3V$ )
- Output Voltage: 1.2V ~ 12.0V
- High Accuracy:  $\pm 2\%$  /  $\pm 1\%$  (Typ.)
- High Power Supply Rejection Ratio:  
70dB @ 1kHz
- Low Output Noise:  
27 x  $V_{OUT}$   $\mu$ V<sub>RMS</sub> (10Hz ~ 100kHz)
- Excellent Line and Load Transient Response
- Built-in Current Limiter, Short-Circuit Protection
- Over-Temperature Protection

- Wireless Communication Equipments
- Portable Audio Video Equipments
- Car Navigation Systems
- LAN Cards
- Ultra Low Power Microcontroller

### ■ BLOCK DIAGRAM

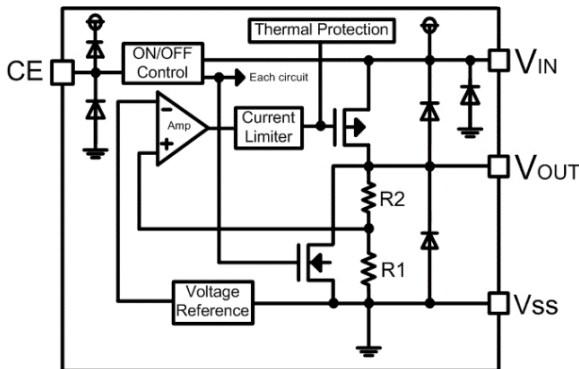


### ■ ORDER INFORMATION

#### SML311①②③④⑤


DESIGNATOR	SYMBOL	DESCRIPTION
①	A	Standard
	B	High Active, pull-down resistor built in, with $C_{OUT}$ discharge resistor
②③	Integer	Output Voltage e.g. 1.8V = ②:1, ③:8
④	M/ MC/ MY	Package:SOT-23-3
	M/MF/MR	Package:SOT-23-5
	P/PT/PL	Package:SOT-89-3/5
	G	Package:SOT-223
	T/TA/TB/TC	Package:TO-92
⑤	-	2% Accuracy
	1	1% Accuracy

## ■ PIN CONFIGURATION (Top View)


SOT-23-3




SOT-23-5




SOT-89-3



SOT-89-5

TO-92  
(Bottom view)

SOT-223



SML311A

PIN NUMBER											PIN	FUNCTION
SOT-23-3			SOT-89-3			TO-92				SOT-223		
M	MC	MY	P	PT	PL	T	TA	TB	TC	G		
1	3	3	1	2	2	1	2	2	1	1	V <sub>SS</sub>	Ground
2	2	1	3	1	3	3	3	1	2	3	V <sub>OUT</sub>	Output
3	1	2	2	3	1	2	1	3	3	2	V <sub>IN</sub>	Power input

SOT-23-5

PIN NUMBER		PIN NAME	FUNCTION
MF	MR		
1	2	V <sub>IN</sub>	Power Input
2	1	V <sub>SS</sub>	Ground
3/4	4/5	NC	No Connection
5	3	V <sub>OUT</sub>	Output

SML311B

SOT-23-5

PIN NUMBER	PIN NAME	FUNCTION
M		
1	V <sub>IN</sub>	Power Input
2	V <sub>SS</sub>	Ground
3	CE	Chip Enable Pin High Active, pull-down resistor built in
4	NC	No Connection
5	V <sub>OUT</sub>	Output Pin with C <sub>OUT</sub> discharge resistor

## SOT-89-5

PIN NUMBER	PIN NAME	FUNCTION
P		
1	V <sub>OUT</sub>	Output Pin with C <sub>OUT</sub> discharge resistor
2	V <sub>SS</sub>	Ground
3	NC	No Connection
4	CE	Chip Enable Pin High Active, pull-down resistor built in
5	V <sub>IN</sub>	Power Input Pin

### ■ ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

(Unless otherwise specified, T<sub>A</sub> = 25°C)

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage <sup>(2)</sup>		V <sub>IN</sub>	-0.3 ~ 33	V
Output Voltage <sup>(2)</sup>		V <sub>OUT</sub>	-0.3 ~ 13	V
CE Pin Voltage		V <sub>CE</sub>	-0.3 ~ 33	V
Output Current		I <sub>OUT</sub>	600	mA
Power Dissipation	SOT-23-3/5	P <sub>D</sub>	400	mW
	SOT-89		600	
	SOT-223		800	
	TO-92		500	
Operating Junction Temperature Range <sup>(3)</sup>		T <sub>j</sub>	-40 ~ 150	°C
Operating free air temperature range		T <sub>A</sub>	-40 ~ 85	°C
Storage Temperature		T <sub>stg</sub>	-55 ~ 125	°C
Lead Temperature(Soldering, 10 sec)		T <sub>solder</sub>	260	°C
ESD rating	Human Body Model-(HBM)		≥ 2	kV
	Machine Model-(MM)		≥ 200	V

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device.

These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to network ground terminal.

(3) The SML311 includes over temperature protection that is intended to protect the device during momentary overload. Junction temperature will exceed 150°C when over temperature protection is active.

## ■ ELECTRICAL CHARACTERISTICS


SML311 Series ( $V_{IN} = V_{OUT} + 1V$ ,  $C_{IN} = C_{OUT} = 1\mu F$ ,  $T_A = 25^\circ C$ , unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP. <sup>(4)</sup>	MAX.	UNIT	
Input Voltage	$V_{IN}$		2.5	—	28	V	
Output Voltage Range	$V_{OUT}$		1.2	—	12	V	
Output Voltage Accuracy		$I_{OUT} = 1mA$	-2	—	2	%	
Dropout Voltage	$V_{dif}^{(5)}$	$I_{OUT} = 100mA, V_{OUT} = 3.3V$	—	200	—	mV	
Supply Current	$I_{SS}$	$I_{OUT} = 0$	$1.2V \leq V_{OUT} \leq 7.0V$	—	1.8	5	$\mu A$
			$7.0V < V_{OUT} \leq 12.0V$	—	2.5	6	$\mu A$
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta V_{IN}}$	$I_{OUT} = 10mA$ $V_{OUT} + 1V \leq V_{IN} \leq 28V$	—	0.01	0.3	%/V	
Load Regulation	$\Delta V_{OUT}$	$V_{IN} = V_{OUT} + 1V$ , $1mA \leq I_{OUT} \leq 100mA$	—	10	—	mV	
Temperature Coefficient	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta T_A}$	$I_{OUT} = 10mA$ , $-40^\circ C < T_A < 125^\circ C$	—	50	—	ppm	
Output Current Limit	$I_{LIM}$	$V_{OUT} = 0.5 \times V_{OUT(Normal)}$ , $V_{IN} = 5V$	350	600	—	mA	
Short Current	$I_{SHORT}$	$V_{OUT} = V_{SS}$	—	100	—	mA	
Power Supply Rejection Ratio	PSRR	$I_{OUT} = 50mA$	100Hz	—	80	—	dB
			1kHz	—	70	—	
			10kHz	—	55	—	
			100kHz	—	45	—	
Output Noise Voltage	$V_{ON}$	BW = 10Hz to 100kHz	—	$27 \times V_{OUT}$	—	$\mu V_{RMS}$	
Thermal Shutdown Temperature	$T_{SD}$	—	—	160	—	$^\circ C$	
Thermal Shutdown Hysteresis	$\Delta T_{SD}$	—	—	20	—	$^\circ C$	
Standby Current	$I_{STBY}$	$CE = V_{SS}$	—	—	0.2	$\mu A$	
CE "High" Voltage	$V_{CE"H"}$		1.2	—	$V_{IN}$	V	
CE "Low" Voltage	$V_{CE"L"}$		—	—	0.3	V	
$C_{OUT}$ Auto-Discharge Resistance	$R_{DISCHRG}$	$V_{IN} = 5V, V_{OUT} = 3.0V$ , $V_{CE} = V_{SS}$	—	150	—	$\Omega$	

(4) Typical numbers are at  $25^\circ C$  and represent the most likely norm.

(5)  $V_{dif}$ : The Difference Of Output Voltage And Input Voltage When Input Voltage Is Decreased Gradually Till Output Voltage Equals To 98% Of  $V_{OUT}$  (E).

## ■ TYPICAL APPLICATION CIRCUIT

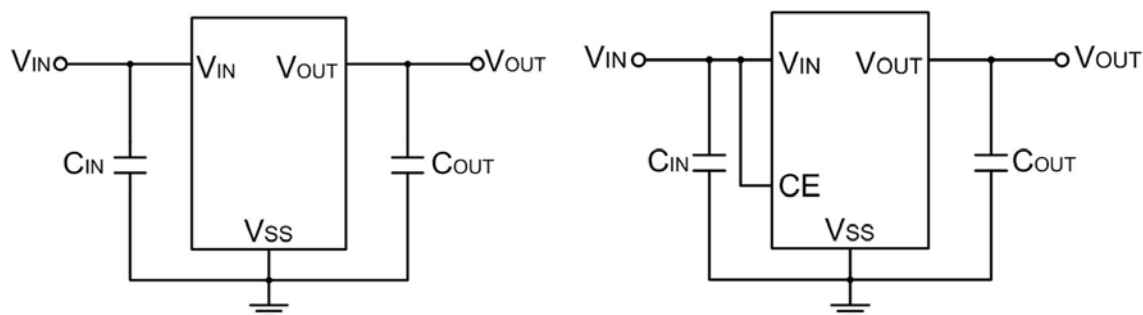

### External Components List

Symbol	Description
$C_{IN}$	1.0 $\mu$ F or more
$C_{OUT}$	1.0 $\mu$ F or more

## ■ APPLICATION INFORMATION

### Selection of Input/ Output Capacitors

Phase compensation is provided to secure operation even when the load current is varied. For this purpose, use a 1.0 $\mu$ F or more output capacitor ( $C_{OUT}$ ) with good frequency characteristics and proper ESR (Equivalent Series Resistance). Connect a 1.0 $\mu$ F or more input capacitor ( $C_{IN}$ ) between the  $V_{IN}$  pin and the  $V_{SS}$  pin as close as possible to the pins.

The value of the output overshoot or undershoot transient response varies depending on the value of the output capacitor.







When selecting the output capacitor, perform sufficient evaluation, including evaluation of temperature characteristics, on the actual device.

In the design of portable devices the ceramic capacitors are often chosen because of their small size, low equivalent series resistance (ESR) and high RMS current capability. Also, designers have been looking to ceramic capacitors due to shortages of tantalum capacitors.


Unfortunately, using ceramic capacitors for input filtering can cause problems. Applying a voltage step to a ceramic capacitor causes a large current surge that stores energy in the inductances of the power leads. A large voltage spike is created when the stored energy is transferred from these inductances into the ceramic capacitor. These voltage spikes can easily be twice the amplitude of the input voltage step.

Many types of capacitors can be used for input bypassing, however, caution must be exercised when using multilayer ceramic capacitors (MLCC). Because of the self-resonant and high Q characteristics of some types of ceramic capacitors, high voltage transients can be generated under some start-up conditions, such as connecting the LDO input to a live power source. Adding a 3 $\Omega$  resistor in series with an X5R ceramic capacitor will minimize start-up voltage transients.

■ TYPICAL PERFORMANCE CHARACTERISTICS

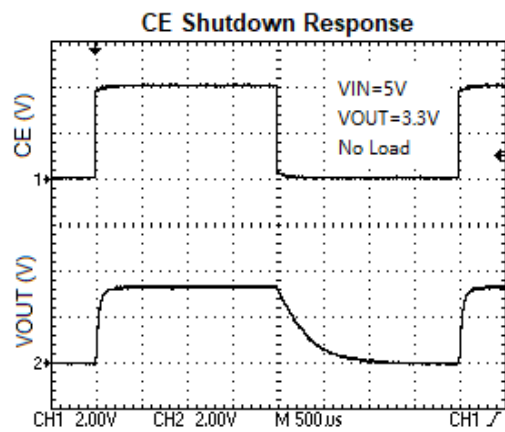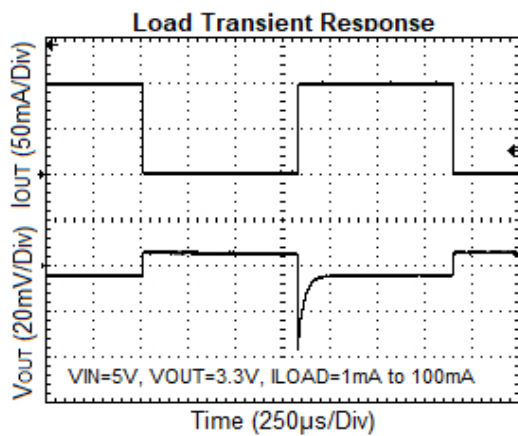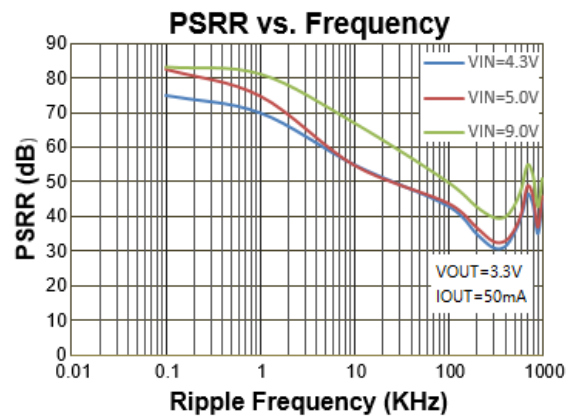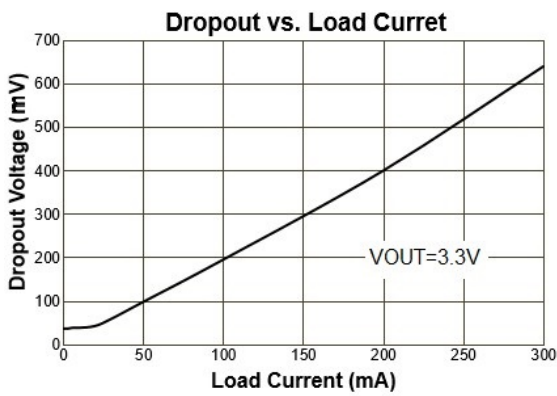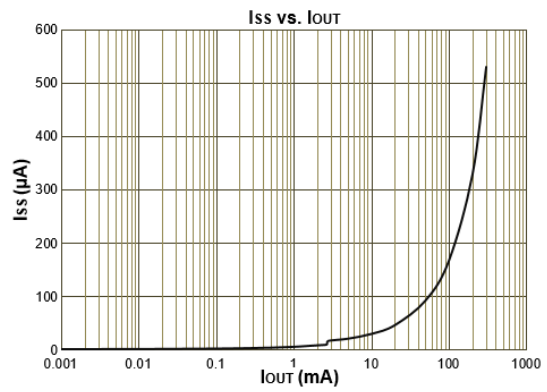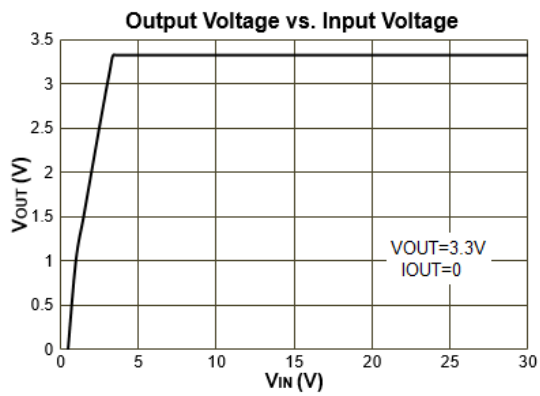


- PACKAGING INFORMATION
- SOT-23-3 PACKAGE OUTLINE DIMENSIONS

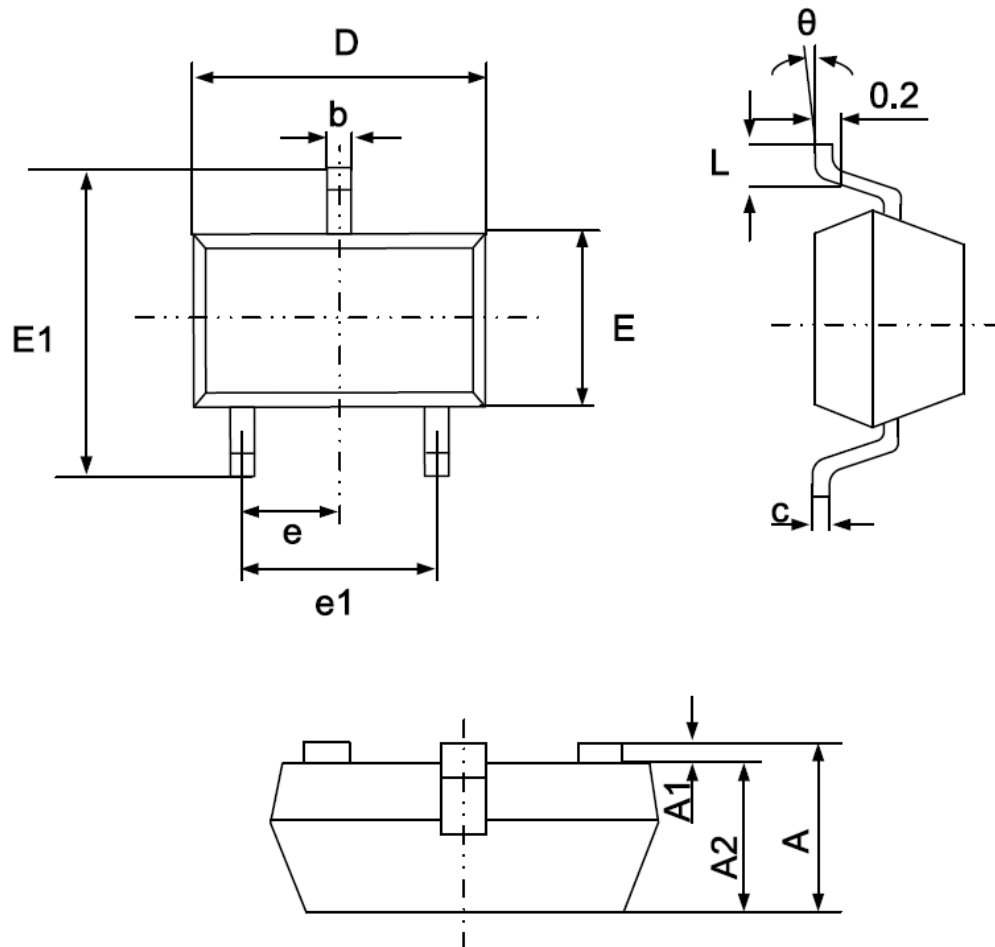

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°


- SOT-23-5 PACKAGE OUTLINE DIMENSIONS

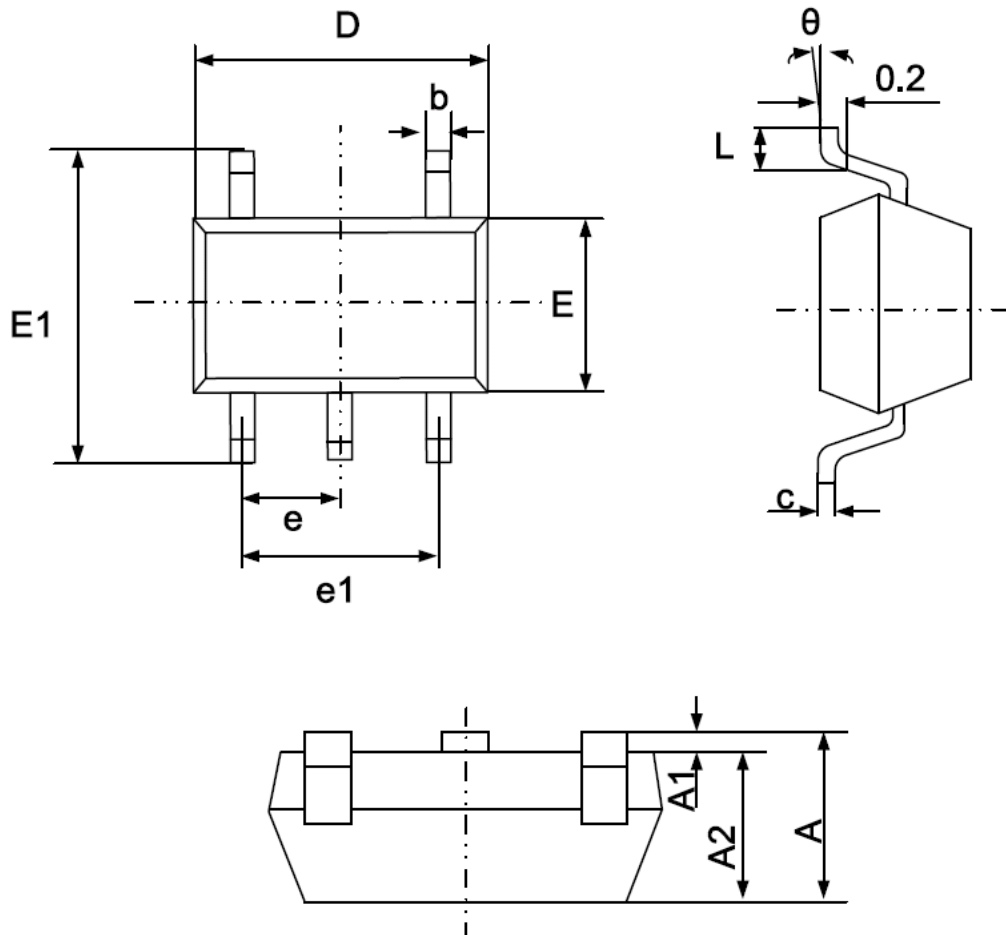

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°




- SOT-89-3 PACKAGE OUTLINE DIMENSIONS

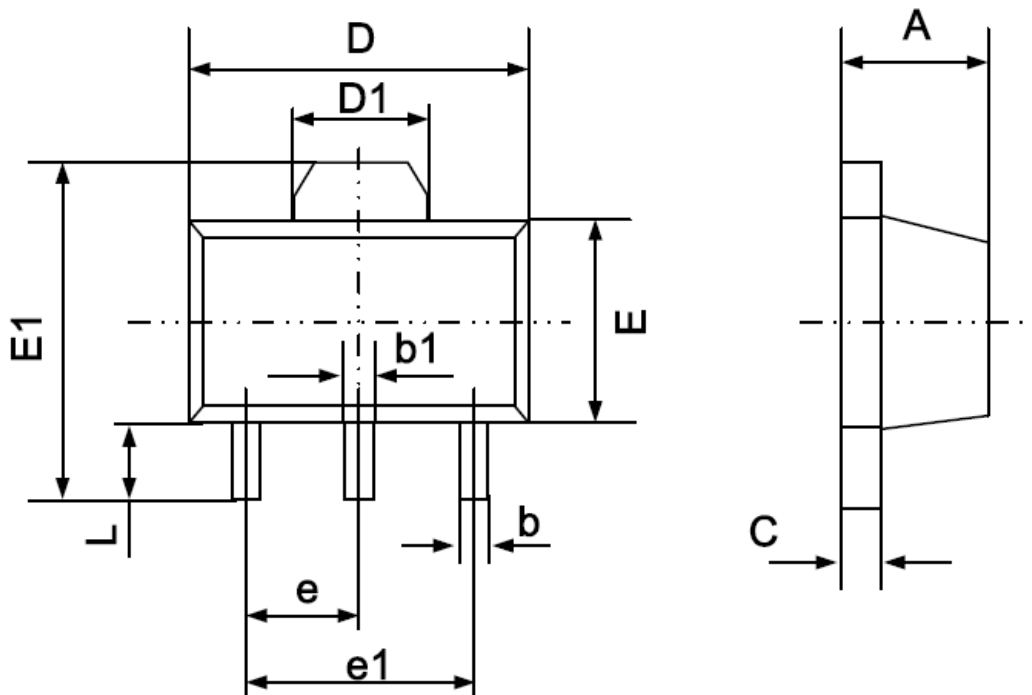


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

- SOT-89-5 PACKAGE OUTLINE DIMENSIONS

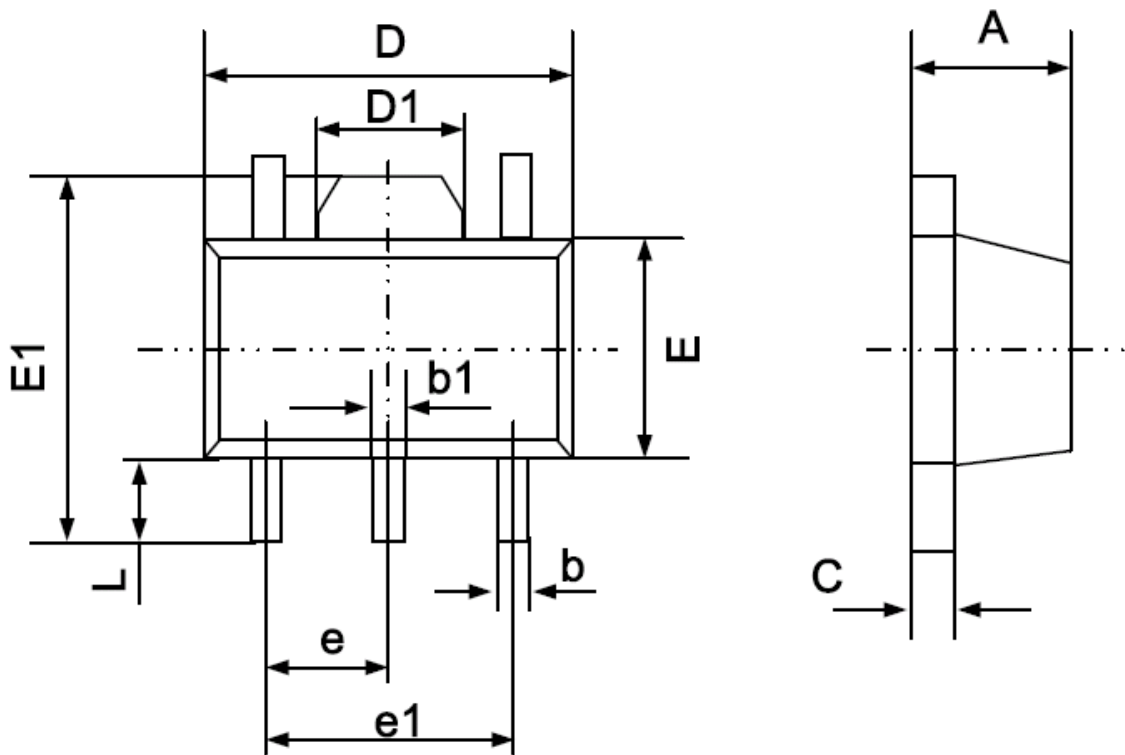


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043

- SOT-223 PACKAGE OUTLINE DIMENSIONS

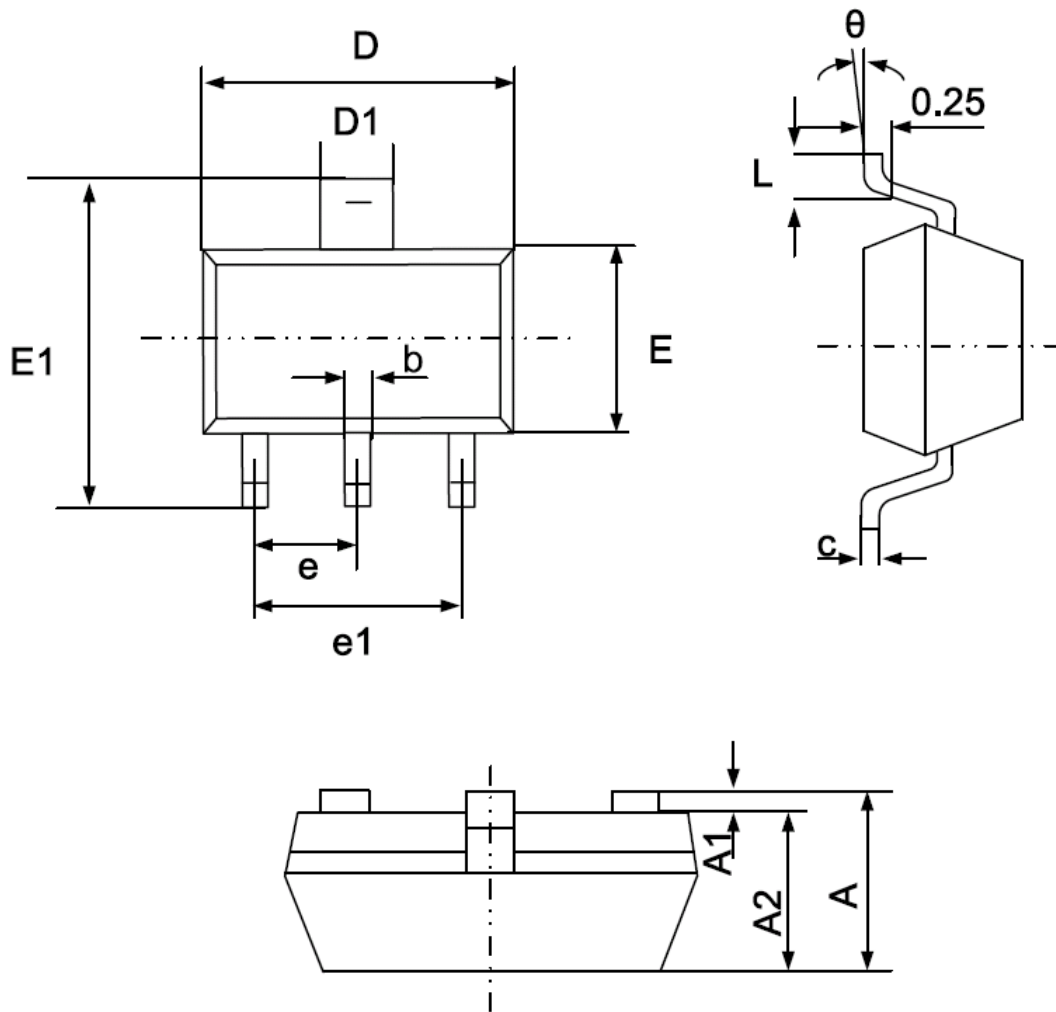

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.200	6.400	0.244	0.252
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300 (BSC)		0.091 (BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°

- TO-92 PACKAGE OUTLINE DIMENSIONS

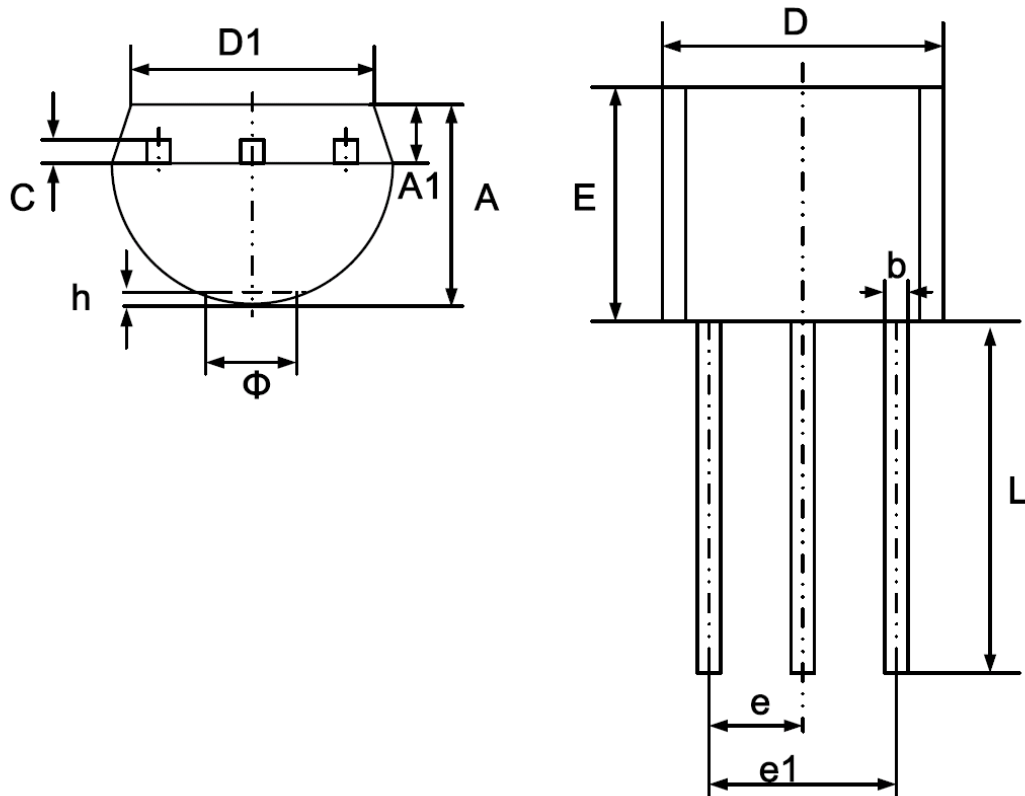

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	3.300	3.800
A1	1.100	1.400
b	0.380	0.600
c	0.300	0.500
D	4.400	4.800
D1	3.430	
E	4.300	4.700
e	1.270 TYP	
e1	2.440	2.640
L	13.00	15.00
$\Phi$		1.600
h	0.000	0.380

© SMTES TECHNOLOGY PTE. LTD.

SMTES cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a SMTES product. No circuit patent license, copyrights or other intellectual property rights are implied. SMTES reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.